


PD-130VR

GB OWNER'S OPERATING MANUAL

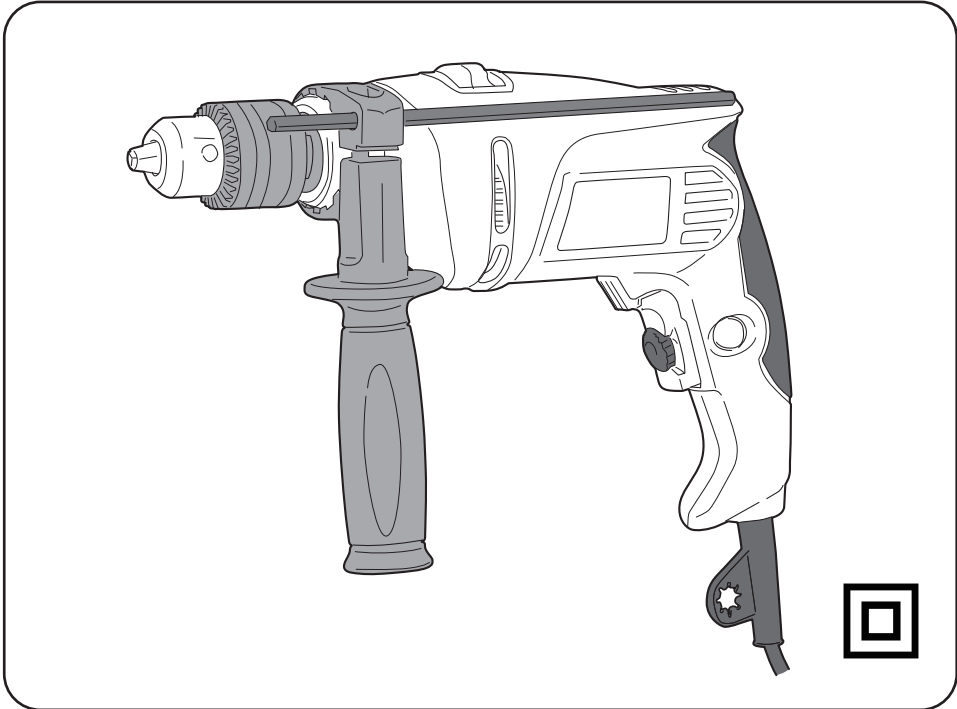

69800975-00 STD
06-22

KYOCERA Industrial Tools Corporation
2-2-54 Matsuhama-cho, Fukuyama-shi,
Hiroshima-ken, 720-0802 Japan

GB ENGLISH

DRILLING IN METAL
Metals such as steel brass, aluminum sheets, stainless steel, and pipe may also be drilled. Mark the point to be drilled with a nail or a punch.


DRILLING IN CONCRETE
Rock and masonry are generally drilled in the impact mode.
When drilling delicate materials such as wall tiles, it is essential to start with ordinary drilling and once the tile is pierced, to continue with impact drilling.
In deep boreholes the drill bit should be pulled out occasionally in order to remove the dust and chips from the hole.


AUX. HANDLE AND ADJUSTMENT STOPPER
Install the aux. handle (7) on the head of the housing and insert the adjustment stopper (6) in the hole provided.
The aux. handle can swivel 360° for the most comfortable position and easiest operation.
The stopper helps keep an accurate depth when drilling holes.

MAINTENANCE
After use, check the tool to make sure that it is in top condition. It is recommended that you take this tool to an Authorised Service Centre for a thorough cleaning and lubrication at least once a year.
DO NOT MAKE ANY ADJUSTMENTS WHILE THE MOTOR IS IN MOTION.
ALWAYS DISCONNECT THE POWER CORD FROM THE RECEPTACLE BEFORE CHANGING REMOVABLE OR EXPENDABLE PARTS (BLADE, BIT, SANDING PAPER ETC.), LUBRICATING OR WORKING ON THE UNIT.

WARNING!
To ensure safety and reliability, all repairs should be performed by an **AUTHORISED SERVICE CENTRE** or other **QUALIFIED SERVICE ORGANISATION**.

SAVE THESE INSTRUCTIONS FOR FUTURE REFERENCE.

“  **WARNING** To reduce the risk of injury, user must read instruction manual ”

“  Class II construction tool in which protection against electric shock does not rely on basic insulation only, but in which additional safety precaution, such as double insulation or reinforced insulation, are provided.”

