

AVC51

Ⓒ OWNER'S OPERATING MANUAL

KYOCERA Industrial Tools Corporation
2-2-54 Matsuhama-cho, Fukuyama-shi,
Hiroshima-ken, 720-0802 Japan



69800493-00 STD
08-20

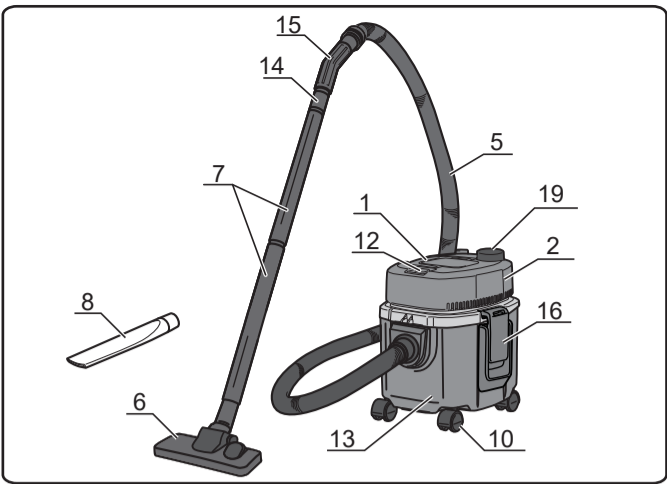


fig.1

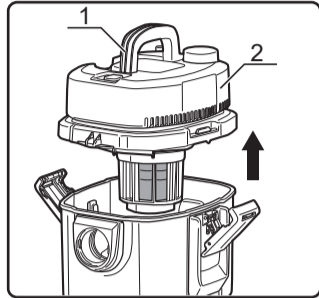


fig.2

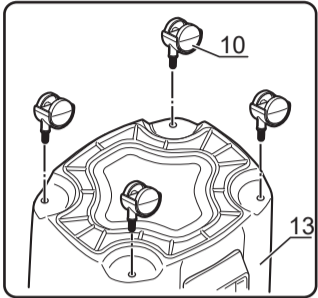


fig.3

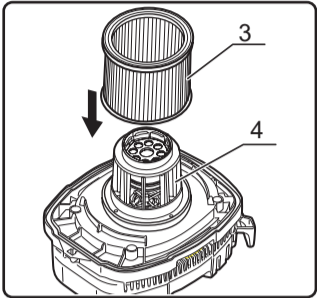


fig.4-1

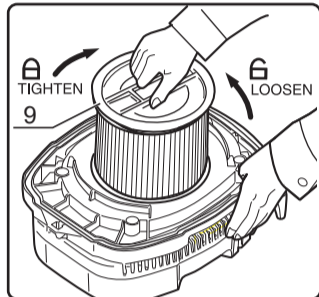


fig.4-2

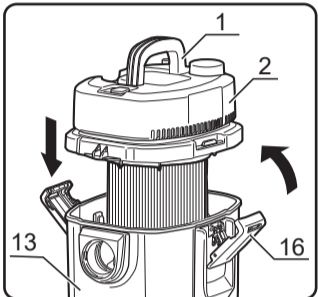


fig.5

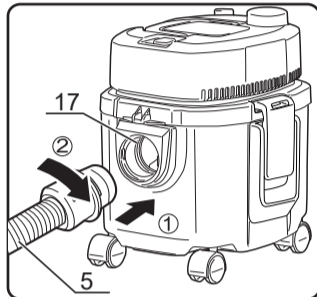


fig.6

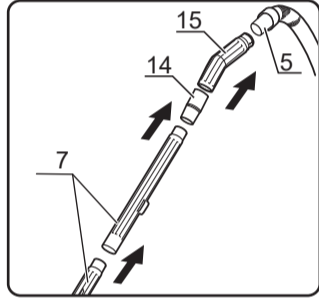


fig.7-1

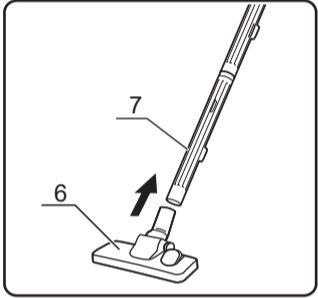


fig.7-2

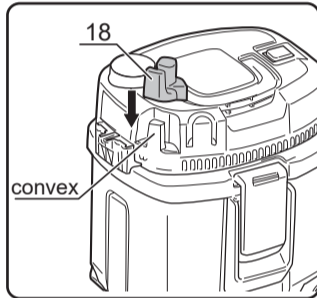


fig.8

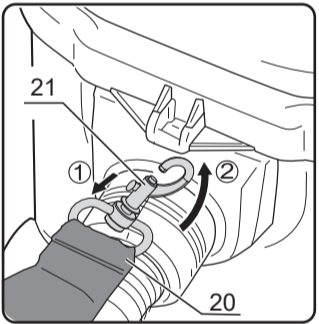


fig.9

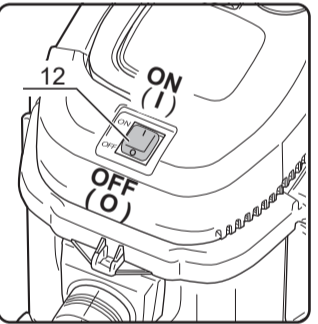


fig.10



fig.11-1



fig.11-2

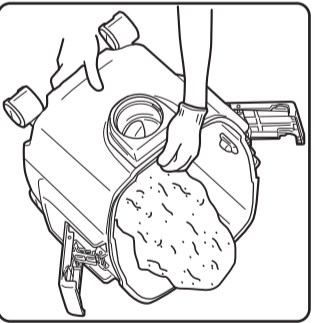


fig.12

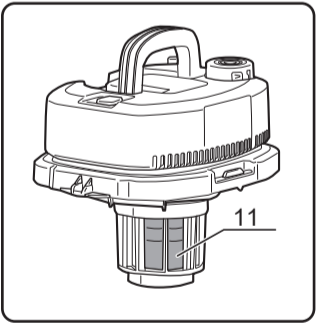


fig.13

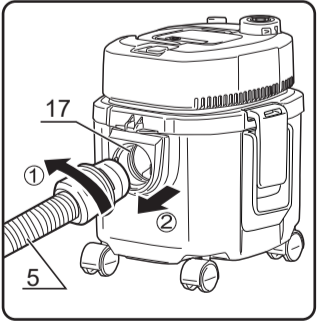


fig.14

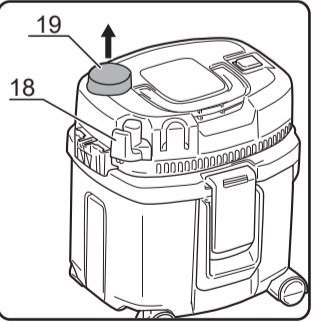


fig.15

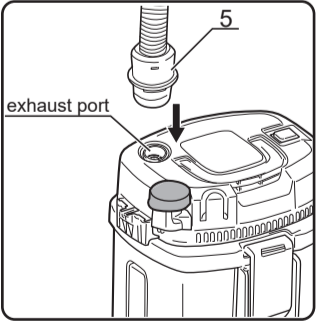


fig.16



fig.17

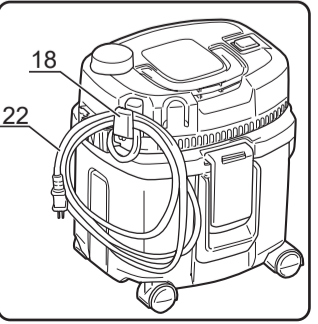


fig.18

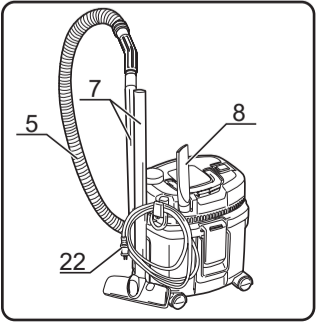


fig.19

Thank you for purchasing our product. Manufactured to a high standard this product will, if used according to these instructions and properly maintained, give you years of trouble free performance.

IMPORTANT: PLEASE READ THESE INSTRUCTIONS CAREFULLY. NOTE THE SAFE OPERATIONAL REQUIREMENTS, WARNING & CAUTIONS. USE THE PRODUCT CORRECTLY AND WITH CARE FOR THE PURPOSE FOR WHICH IT IS INTENDED. NOT DOING SO MAY CAUSE DAMAGE AND/OR PERSONAL INJURY, AND WILL INVALIDATE THE WARRANTY. PLEASE KEEP INSTRUCTIONS SAFE FOR FUTURE USE.

SAFETY INSTRUCTIONS

GENERAL SAFETY

- Disconnect the cleaner from the power supply before servicing, changing accessories, or performing any maintenance.
 - Use only genuine parts and accessories. Unauthorized parts and accessories may be dangerous and will invalidate your warranty.
 - Maintain the cleaner in good condition. Use authorized agent for servicing. Keep machine clean, but DO NOT use solvents.
 - Ensure the correct cartridge filter is firmly in place before operating the cleaner. Wrong cartridge filter may cause machine faults and will invalidate your warranty.
 - Wear protective clothing and gloves.
 - DO NOT allow children or untrained persons to operate the cleaner.
 - DO NOT place attachments close to your face (especially eyes, ears, etc.). Do not point the hose end at other persons or animals.
 - DANGER! DO NOT vacuum hot or glowing ash, cigarette ends, inflammable, explosive, corrosive or other dangerous substances.
 - DO NOT operate the unit without cartridge filter.
 - DO NOT leave machine running unattended. Turn power supply OFF, and DO NOT leave the vicinity until motor has come to a complete stop.
 - DO NOT operate the cleaner while under the influence of drugs, alcohol or impairing medication, or if you are tired.
 - DO NOT use the cleaner in the rain or in very damp conditions.
 - DO NOT use the cleaner for a task it is not designed to perform.
 - When not in use, store the cleaner in a safe, dry, childproof location.
- [For a polarized plug version]
- The machine which has polarized plug cannot be plugged, if the direction of the plug is not right. Therefore, if the plug does not fit fully in the outlet, reverse the plug. If it does not fit, contact a qualified electrician to install the proper outlet. Do not change the plug in any way.

CONTENTS AND SPECIFICATIONS

- Carton content
- Carefully unpack the carton.
- Locate the two side latches which hold the top cover in place.
- Undo the latches, remove the top cover and take out the items in the container. (fig.1, 2)
- Check and identify each component as listed below. If anything is missing or damaged please contact your supplier immediately.

SPECIFICATIONS

Rated input power	1,050W
Air volume	1.2 m ³ /min
Vacuum degree	16kPa
Container capacity	Dry 5 litres
	Wet 5 litres
Weight	4.0 kg

DESCRIPTION

1. Handle
2. Top cover
3. Wet/Dry cartridge filter
4. Filter basket
5. Hose
6. Wet/Dry floor nozzle
7. Extension Tube (x2)
8. Crevice tool
9. Filter lock
10. Castor (x4)
11. Safety float valve
12. Switch
13. Container
14. Pipe adaptor
15. Joint handle
16. Latch (x2)
17. Vacuum hose connection
18. Cord hook
19. Cap (exhaust port)
20. Shoulder strap
21. Hook
22. Power cord

ASSEMBLY

- Ensure the mains plug is disconnected.
- Undo latches(16). (fig.1)
- Lift off the top cover(2). (fig.2)
- Turn the container upside down and insert the castors(10). Ensuring they are mounted correctly pushed all the way in. (fig.3)
- Fit the wet/dry cartridge filter(3) and screw on the filter lock(9) till tight. (fig.4-1, 4-2)
- Replace the top cover(2) onto the container(13). (fig.5)
- Align the top cover with the latches and snap into place, by applying pressure at the mid point of the latches. (fig.5)
- Insert the large end of the hose(5) into the vacuum hose connection(17) and screw it on till tight. (fig.6)
- Choose the desired nozzle/extension tube(s)/joint handle and push it onto the small end of the hose. (fig.7-1, 7-2)
- Insert the cord hook(18) into the convex of the top cover. (fig.8)
- Attach the hooks of the shoulder strap onto the mounts of the top cover. (fig.9)

OPERATION (Fig.10 - 13)

WARNING! Ensure you read, understand and apply the SAFETY INSTRUCTIONS.

Reminder: DO NOT vacuum hazardous substances. Use of an incorrect dust bag will invalidate your warranty.

- Ensure the switch is 'Off'(position 'O') before plugging into the power supply. (fig.10)
- Plug in the power supply.
- Switch the motor 'ON' (position 'I'). (fig.10)
- When you have completed vacuuming, press the switch to 'Off'. (position 'O'), and unplug from power supply. Regularly check the cartridge filter.
- After use, empty the container. In case of wet vacuuming, empty the container and dry. (fig.12)

- To vacuum large quantities of liquid, from a sink or tank etc., do not immerse the nozzle completely in the liquid, leave a gap at the top of the nozzle opening to allow an air inflow. The machine is fitted with a float valve(11) which stops the suction action when the container has reached its maximum capacity. (fig.13) The user will notice an increase in motor speed. When this happens, turn off the machine, disconnect from power supply, remove the head from the container and empty the liquid into a suitable receptacle or drain. To continue vacuuming, refit the head and proceed. After wet vacuuming, turn the machine off and remove plug from power supply. Empty the container and clean/dry the inside and outside before storage.


USING AS A BLOWER (Fig.14 - 17)

Can be used as a blower by installing the hose onto the exhaust port .

- Ensure to clean the hose, nozzle, inside of tank and cartridge filter before using as a blower.
- Detach the hose from the suction port. (fig.14)
- Remove the cap(19) from the exhaust port. (fig.15)
- Insert the hose into the exhaust port. (Fig.16)

MAINTENANCE

- Ensure the machine is unplugged from the power supply.
- Disconnect the hose from the container. (fig.14)
- Undo the latches(16) and remove the motor head from the container.
- Clear out any dirt or debris liquid from the container and hose.
- Check the hoses and attachments, and check the power cable to make sure it has not received any damage.
- The crevice tool(8), extension tube(7), and power cord(22) can be stored on the main unit. (fig.18,19)

 Class II construction tool in which protection against electric shock does not rely on basic insulation only, but in which additional safety precaution, such as double insulation or reinforced insulation, are provided.

TROUBLESHOOTING

Fault	Cause	Remedy
Cleaner do not operate.	1. No power supply. 2. Faulty power cable, switch or motor. 3. Container full of liquid.	1. Check supply. 2. Check and repair or replace faulty item. 3. Empty container.
Dust comes from the motor cover.	Cartridge filter missing or damaged.	Fit or replace cartridge filter.
Reduced efficiency and increased motor speed/ vibration.	Nozzle, hose or container inlet blocked.	Check nozzle, hose and container inlet for blockage.

IMPORTANT! YOU MUST CHANGE THE CARTRIDGE FILTER REGULARLY. IF THE MACHINE IS USED WITHOUT THE CARTRIDGE FILTER THE MOTOR WILL BURN OUT EVENTUALLY AND YOUR GUARANTEE WILL BE INVALIDATED.